

Indented Cylinders JCT




We separate the wheat from the chaff

- › Used for separating impurities and admixtures which has different length than grain
- › Easy adjustment at different grain variety
- › High capacity machine with compact construction
- › Easy installation, commissioning and operation
- › Robust body with operational reliability

| JCT | | |
|-------------------|--|---------------|
| Cylinder diameter | mm | 400, 600, 900 |
| Cylinder length | mm | 1000 - 3000 |
| Capacity | t/h | 1 - 10 |
| Function | R – Round grain separating (broken grain, bedstraw) L – Long grain separating (oat) RL – combined round and long separating PLR – combined separation of short/round and long admixtures with pre-sorting | |

Functional Diagram of the Indented Cylinder JCT

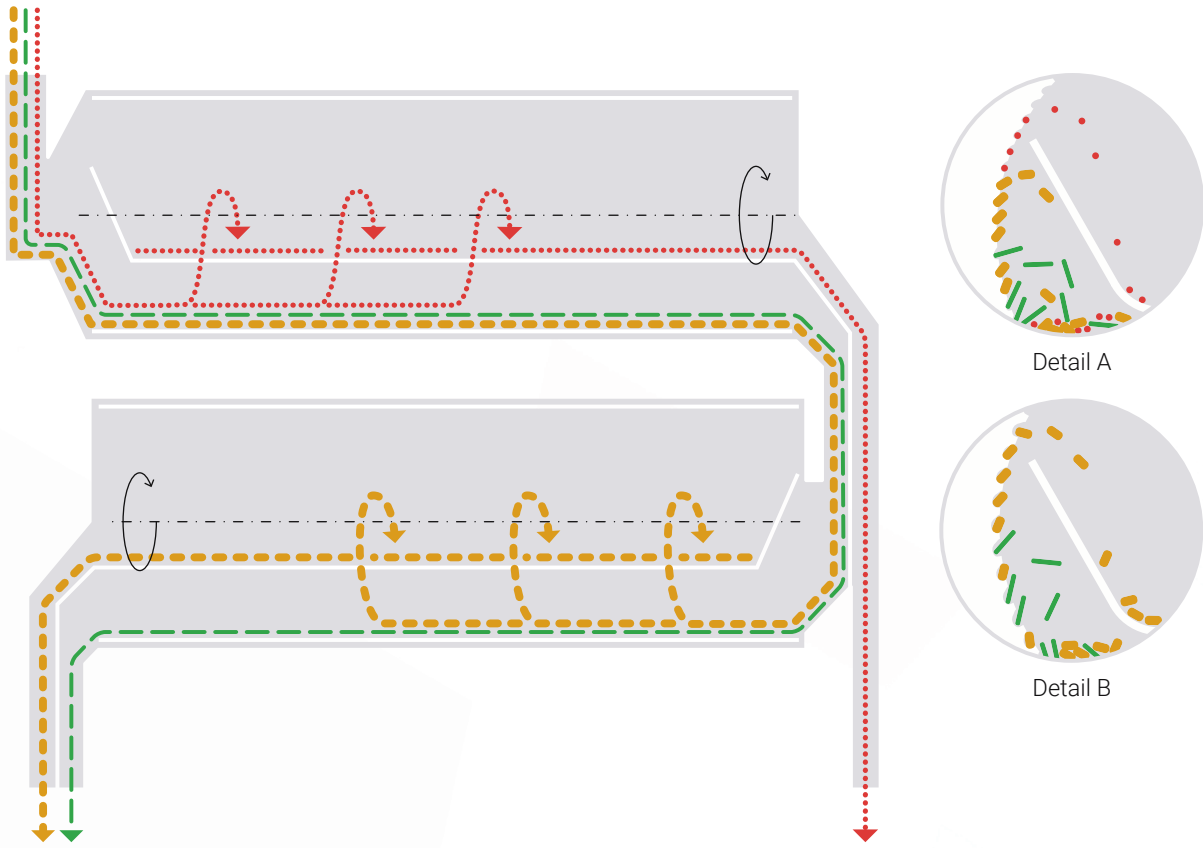

- Clean product
- Coarse impurities
- Small impurities
- Moving parts of the machine