

Destoners JGD




We separate the wheat from the chaff

- › Intended for destoning, sorting of material on the light and heavy fractions
- › For use in grain mills, dehulling lines, flakes production and other food processing lines
- › High efficiency, easy and accurate adjustment
- › Low energy consumption
- › Dust-free operation

JGD			03	05	08	12
Capacity		t/h	1-2	2-6	6-12	8-16
Sieve area		m²	0,21	0,5	1	1,5
Input power		kW	0,3	0,5	1,1	1,5
Air consumption - exhaustion		m³/s	0,42	1	2	3
Dimensions	Length	mm	1170	1640	1835	1850
	Width	mm	780	1020	1320	1660
	Height	mm	1335	1745	1750	2330
Weight		kg	205	380	450	640

Functional Diagram of the Destoner JGD

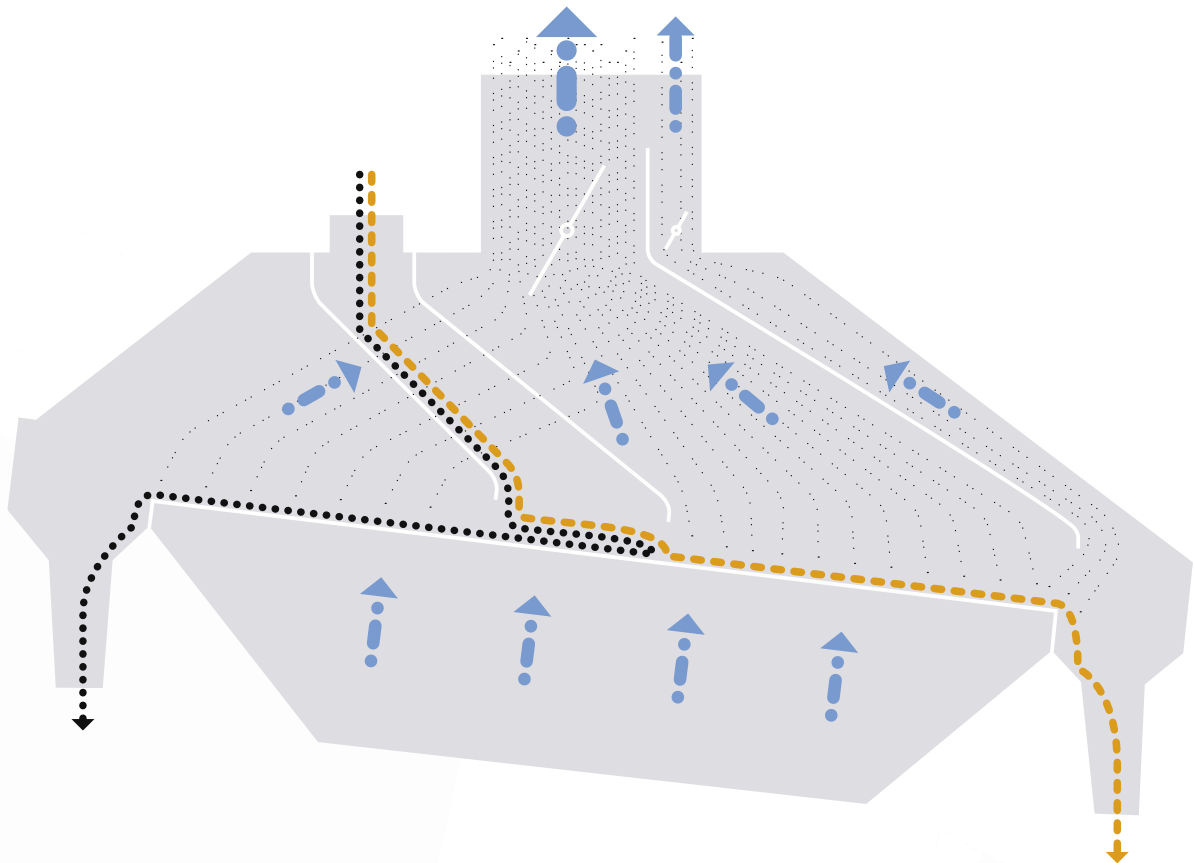

-
- Clean product
 - Heavy impurities (stones)
 - Air
 - Light impurities